




# SUB 8008-AS

PROFESSIONAL POWERED DUAL 18" SUBWOOFER

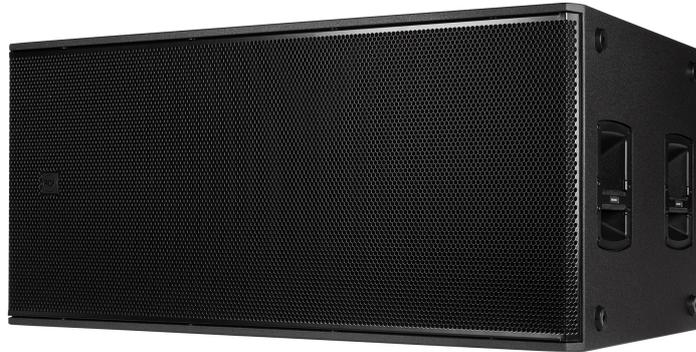

## Description

The SUB 8008-AS is a double 18" high power active subwoofer for live bands, DJs, Clubs, and Rental Companies. It employs a state-of-the-art transducer featuring a high-power ceramic magnetic circuit with a 4" voice coil. The power amplifier manages extreme currents up to 4400W delivering sound pressure levels up to 137 dB with exceptional headroom. The ultra-fast attack with accurate power handling is managed with high efficiency, producing a very low heat loss for silent and fan-less cooling. Built specifically for demanding live sound applications with deep, powerful bass response. Rear panel controls include 12 presets, crossover frequency, polarity switch, Deep/Punch selection, cardioid, and output delay settings. The tour-ready, rugged all-wood cabinet with scratch-resistant polyurea coating is easy to carry and secure for installation. With its rugged construction, sound quality, and high power, SUB 8008-AS is perfect in mid to big-sized venues and touring applications.

## Features

- › Up to 137 dB Sound Pressure Level
- › 4400W Class-D Bi-Amplification
- › 30-120 Hz linear frequency response
- › 2 x 18" High Power Woofers
- › IP Rated Powercon TRUE1 TOP IN/OUT
- › 8 Crossover Presets and 4 Cardioid Presets

## Part Number


13000752 SUB 8008-AS	220-240 V	Black	EAN 8024530019945
13000753 SUB 8008-AS	115 V	Black	EAN 8024530020194



# SUB 8008-AS

PROFESSIONAL POWERED DUAL 18" SUBWOOFER

Line Art 2D

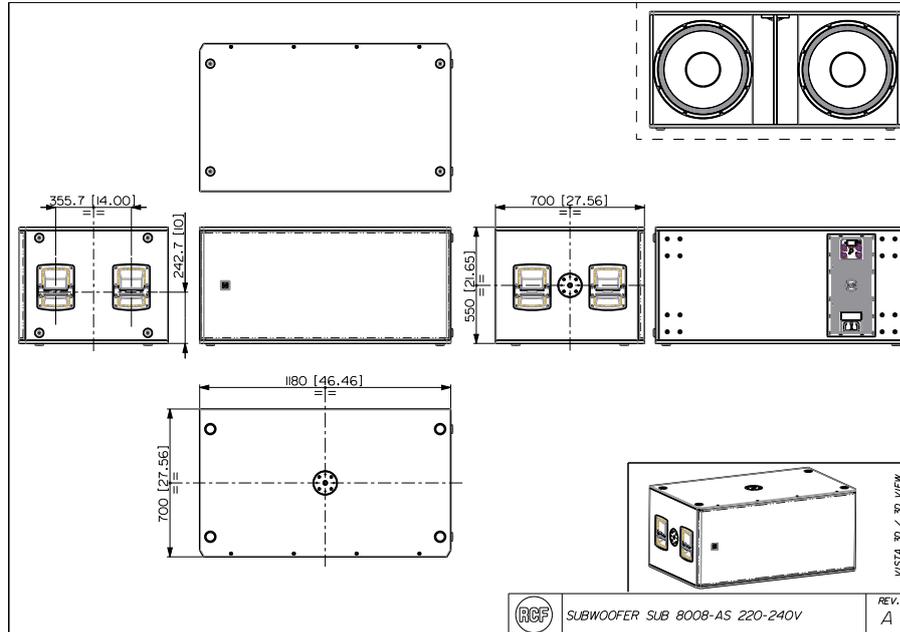

## TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	30 Hz ÷ 120 Hz
	Max SPL @ 1m	137 dB
<b>Transducers</b>	Woofer	2 x 18", 4.0" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	XLR
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
<b>Processor section</b>	Crossover Frequencies	Selectable
	Protections	Thermal, Excurs., RMS
	Limiter	Soft Limiter
	Controls	Xover, Phase switch, Deep/Punch, Output Delay Setting
<b>Power section</b>	Total Power	4400 W Peak
	Low frequencies	4400 W Peak
	Cooling	Convection/Forced
	Connections	Powercon TRUE1 TOP IN/OUT
<b>Standard compliance</b>	Safety agency	CE compliant
<b>Physical specifications</b>	Cabinet/Case Material	Plywood
	Hardware	2 x M20
	Handles	2 x side
	Pole mount/Cap	M20 thread
	Grille	Steel
	Color	Black
<b>Size</b>	Height	550 mm / 21.65 inches
	Width	1180 mm / 46.46 inches
	Depth	700 mm / 27.56 inches
	Weight	80 kg / 176.37 lbs

## ACCESSORIES

**Rigging / Mounting**  
**POLE MOUNT KITS**  
 13360232 AC PMX

EAN 8024530010058



# SUB 8008-AS

PROFESSIONAL POWERED DUAL 18" SUBWOOFER

<b>Rigging / Mounting</b>	13360067 PM-KIT M20	Black	EAN 8024530014599
<b>Protections</b>	<b>BAGS, COVERS, RAIN PROTECTIONS</b>		
	13360518 CVR SUB 8008	Black	EAN 8024530020521
<b>Transportation</b>	<b>WHEELS</b>		
	13360238 WH PRO 4X		EAN 8024530018320